



WS15H

Electric Pedestrian Stacker

Lifting height: 2000-3500 mm / Load capacity: 1500 kg



**Variable Speed
Control**



Intelligent & Efficient



Rugged & Durable



Easy & Comfortable

STAX


Variable Speed Control on Lifting & Lowering

Comfortable and efficient thanks to STAXX patented intelligent handle and control system, ideal for replacing manual & semi-electric stackers, for light use in narrow warehouse environments with efficient and easy pallet stacking.

The proportional lowering brings high efficiency for exact pallet placement and more precise control when compared to the normal fixed speed of lifting & lowering.


Variable speed control by proportional control knob, keeps lifting and lowering smooth, stable, safe and energy saving.

BEFORE



FIXED SPEED

NEW



Precise Control

■ Proportional lifting & lowering

The variable speed control ensures the stacker goes up and down smoothly, minimizing the mechanical shock and vibration, ensuring fragile loads are gently placed on racking or the floor, and reducing the impact of noise and vibration on operators.

■ Lowering buffering

Automatic lowering speed descent with soft buffering when the fork height is lowered to around 10cm from the ground, effectively protects the safety of the cargo, low noise and small vibration.

■ High efficiency

The variable speed control brings accurate response for adjusting the lifting & lowering speed according to the actual situation, the operator can easily complete the task and improve the working efficiency.

■ Energy saving

Compared to the traditional fixed lifting & lowering speed, variable speed can be adjusted according to the load and height by operator, reducing energy waste and improving energy utilization rate.


■ Longer service life

Variable speed control can reduce the mechanical impact and friction during lifting & lowering, reduce the wear and tear on the chassis, mast, bearings, and enable a longer service life.

Lowering speed
+30%

Manoeuvrability
+300%

Energy consumption
-15%

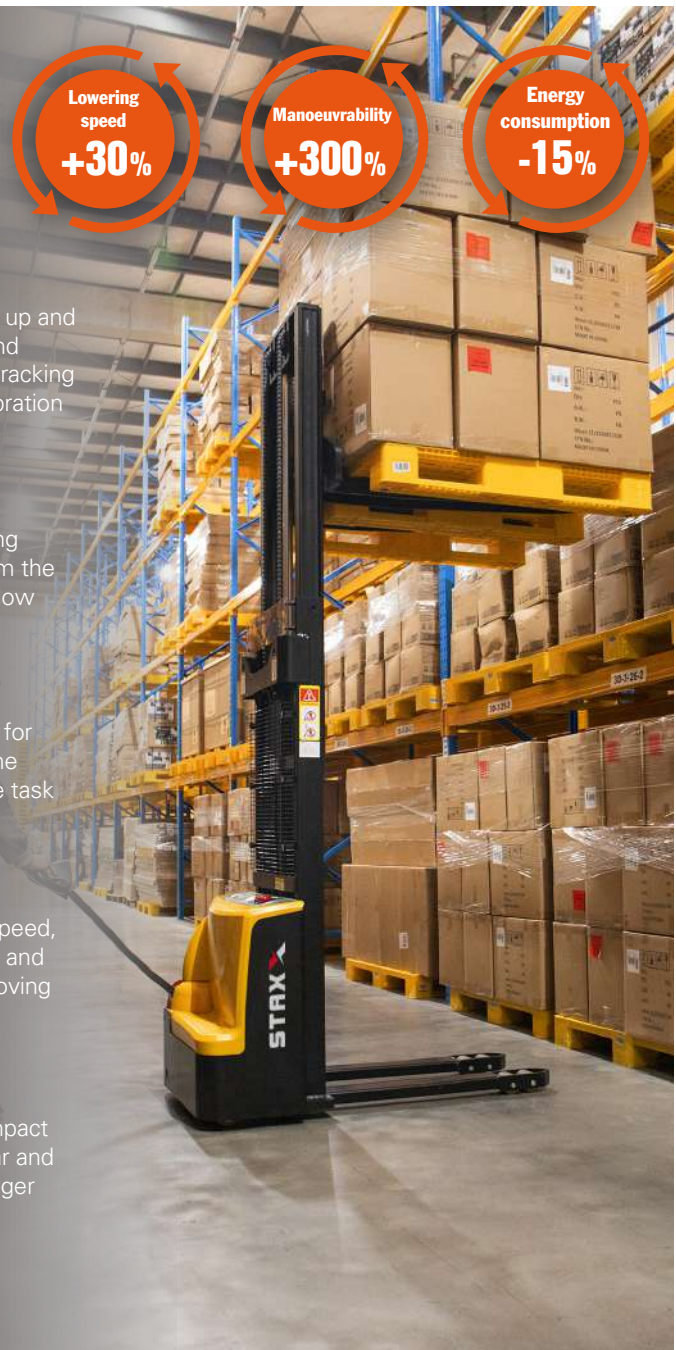

Intelligent & Efficient

Staxx patented multifunctional intelligent tiller handle is unique design for quick fault diagnosis, enabling an easier service, shorter service time and lowered labor costs.



Multifunctional intelligent tiller handle





Easy Maintenance

Serial communication technology

Single wiring harness communication from tiller handle to controller system. Simple, Durable and Stable.

UART

- ✓ Low after-sales service cost
- ✓ Quick & easy fault diagnosis
- ✓ Everyone can be an expert



Operation status & fault diagnosis are integrated onto the tiller handle display for easy troubleshooting.

Operator Preferred

Turtle Speed

01



Enable operator to choose different speed modes based on their experience and the specific work environment.

Up-Right Drive

02



Easily maneuvered with the handle in the vertical position by pressing the turtle-speed button.

Engineering Mode (Brake Release)

03



When truck is down, release the brake to move the unit manually.

Rugged & Durable

Due to a high-strength frame and mast design and solid materials used, the deformation of the frame, mast, and forks is small.



Longer service life

Mast: Standard C+H channel steel
Frame: Steel plate thickness of 5mm
Frame bottom plate: 30mm integrated steel plate



Double-chain design

Compared with single-chain design, it has higher strength, safer and more stable.

Small deformation of forks and masts, stable and durable

More stable when lifting & lowering with loads.

Full coverage protection on mast

Standard equipped with cylinder explosion-proof valve

It can prevent accidents such as uncontrolled descent caused by unexpected rupture of oil pipes, ensuring stable descent of the load and personal safety, and preventing damage to equipment.



High-strength forks

The forks are formed in one piece with a thickness of 8mm steel. High strength and small deformation even under heavy loads.

The battery is fixed at the bottom of the frame

Improved stability.

Battery low voltage protection

Effectively avoid battery over-discharge, ensuring a longer battery life.

Safe operation

Emergency reverse switch

In case of an emergency, it protects the operator and the surrounding personnel from harm.

Safety travel speed limit

When the fork is lifted to above 500mm, the driving speed automatically reduces to 2km/h to ensure the safety of operating at a high position in case of any misoperation.



Built-in charger

Hidden charging plug, high safety, the whole vehicle is powered off during charging, reducing safety hazards.

High lateral and longitudinal stability

Wider wheelbase and longer axle distance.

Adjustable balance wheel

Improved stability and maneuverability, suitable for different working scenarios.

The low ground clearance of 30 mm helps to reduce the risk of foot injuries



Easy & Comfortable



- **Effortless, easy to operate**

Low-mounted longer tiller reduces steering force required.

- **Low mast static height**

Easy to operate in containers and elevators with less than 3.3m lifting height.

- **The steering angle is designed to be above 180 degrees**

Small turning radius.

- **Excellent maneuverability**

Precise and maneuverable operating, high safety and efficiency.

- **Reasonable design of the balancing wheel eccentric distance.**

Flexible direction commutation

- **Easy to recharge**

Built-in charger and an external charging cable storage box for convenient charging.

- **Longer operating time**

Standard 24V/71Ah maintenance-free lead-acid battery, with the option of a larger capacity maintenance-free battery or a lithium battery.



Optional Configuration

- **Intelligent control**

Unique in the market and very suitable for sorting operations on trucks.

With a dedicated remote control device, the operator can control the forks to lift to the appropriate working height and carry out sorting operations, thus avoiding the need to use the handle buttons and bend over to pick up goods, improving operational efficiency and comfort.



● **Lifting button**

● **Lowering button**

● **Max speed setting button**

● **Horn button**



With the remote control device, you can easily set the speed suitable for the work, from level 1 speed to level 5 speed.

Such speed transitions allow you to move the truck with controlled operation at ease.

Speed Level 1 Set



Speed Level 5 Set

- **Reversing buzzer**



- **24V/60Ah LiFePO₄**

- **24V/15A Charger**

Lithium Battery Charger
Charging time: 4 hours



Dimensions

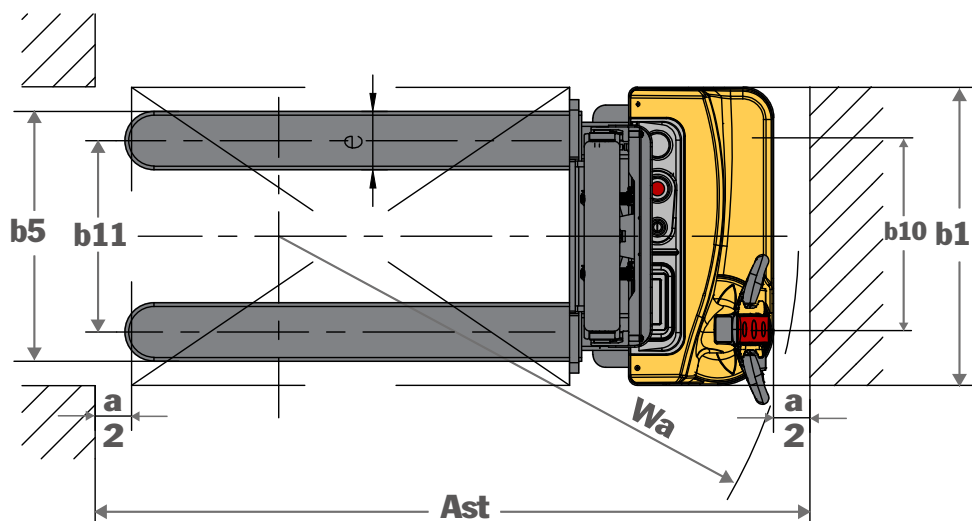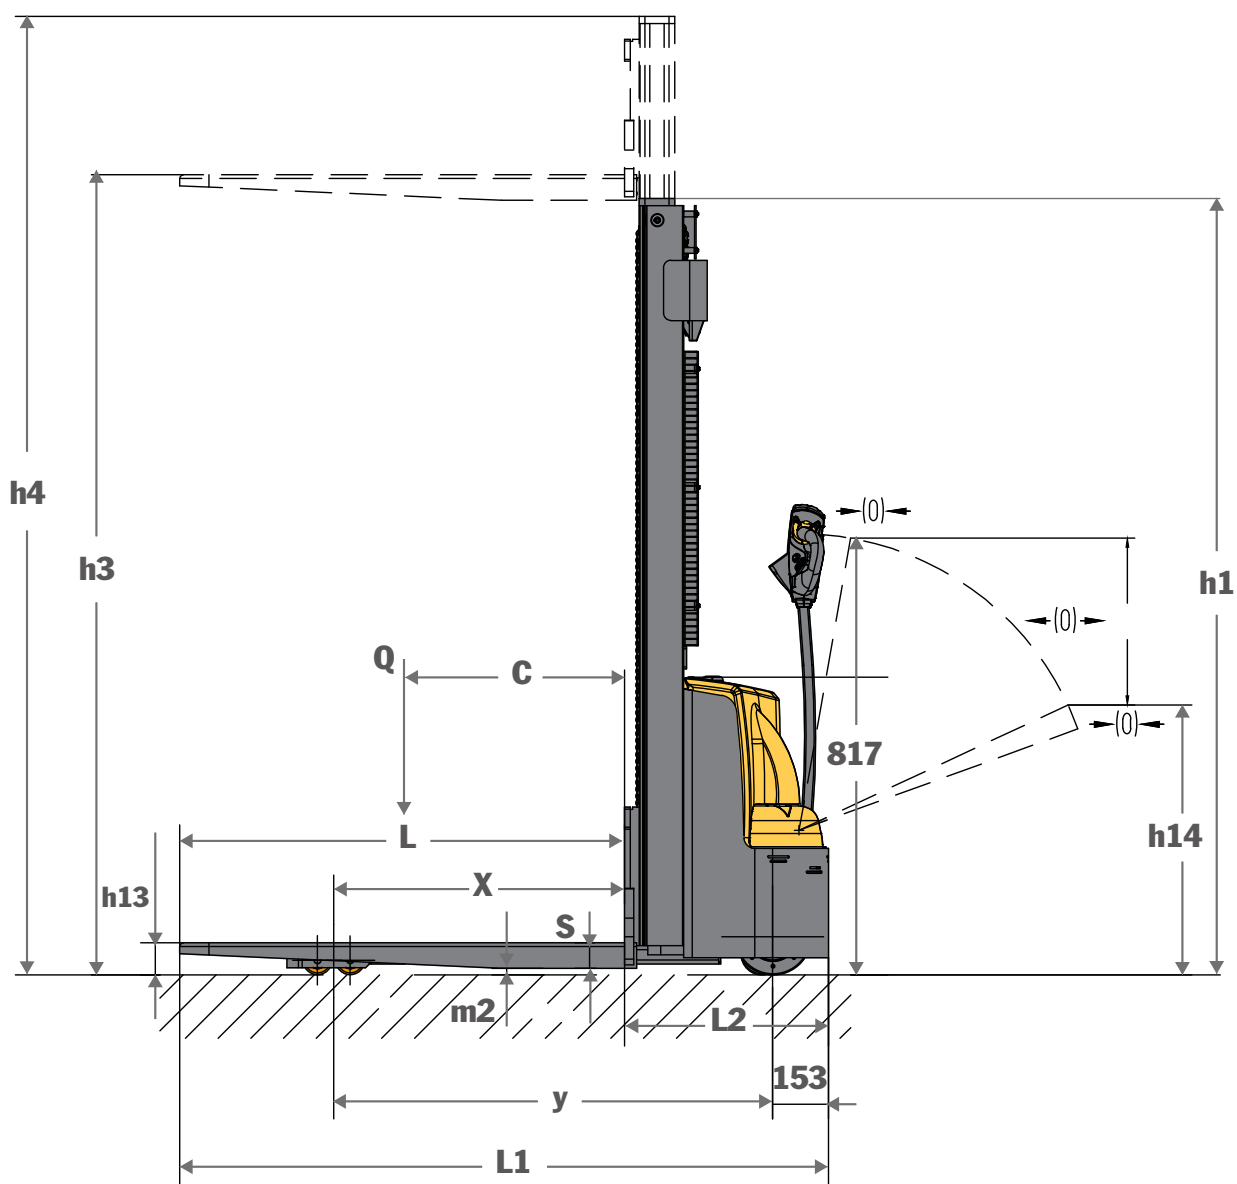


Specifications

MODEL				WS15H				
DISTINGUISHING MARKS								
1.3	Drive							Battery
1.4	Operator type							Pedestrian
1.5	Load capacity/rated load	Q	kg					1500
1.6	Load centre distance	c	mm					600
1.8	Load distance, centre of drive axle to fork	x	mm					796
1.9	Wheelbase	y	mm					1204
WEIGHT								
2.1	Service weight (without battery)		kg	496.4	513.4	523.4	541.4	545.4
2.2	Service weight (with 71Ah battery)		kg	543	560	570	588	592
2.3	Service weight (with 89Ah battery)		kg	548	565	575	593	597
2.4	Axle loading, laden front/rear		kg					603/1409
2.5	Axle loading, unladen front/rear		kg					384/129
TYRES/ CHASSIS								
3.1	Wheels							Polyurethane
3.2	Wheel size, front	Ø x width	mm					Ø210x70
3.3	Wheel size, rear	Ø x width	mm					Ø80X70
3.4	Additional wheels (dimensions)	Ø x width	mm					Ø115X55
3.5	Wheels, number front/rear (x = driven wheels)							1x + 1 / 4
3.6	Tread, front	b10	mm					550
3.7	Tread, rear	b11	mm					390(560)/525(680)
DIMENSIONS								
4.2	Lowered mast height	h1	mm	1480	1730	1980	2130	2230
4.4	Lift height	h3	mm	2000	2500	3000	3300	3500
4.5	Extended mast height	h4	mm	2435	2935	3435	3735	3935
4.9	Height of tiller in driving position, min./max.	h14	mm					692/1255
4.15	Height, lowered	h13	mm					90
4.19	Overall length	l1	mm					1710
4.20	Length to face of forks	l2	mm					561.5
4.21	Overall width	b1	mm					820
4.22	Fork dimensions	s/e/l	mm					70x160x1150
4.25	Width over forks	b5	b5(mm)					560/680
4.32	Ground clearance, centre of wheelbase	m2	m2(mm)					30
4.34.1	Aisle width for pallets 1000 × 1200 crossways	Ast	Ast(mm)					1997
4.34.2	Aisle width for pallets 800 × 1200 lengthways	Ast	Ast(mm)					1952
4.35	Turning radius	Wa	Wa(mm)					1490
PERFORMANCE DATA								
5.1	Travel speed, with/without load		km/h					4/4.5
5.2	Lift speed, with/without load		mm/s					0-87 / 0-130
5.3	Lowering speed, with/without load		mm/s					27.8-137 / 22.5-167
5.8	Max. gradeability, with/without load		%					5/15
5.10	Service brake							Electromagnetic
ELECTRIC-ENGINE								
6.1	Drive motor rating S2 60 min		kW					0.75
6.2	Lift motor rating at S3 15%		kW					2.2
6.4	Battery voltage/nominal capacity (C5)		V/Ah					● 12/71 x 2 ○ (12/89) x 2
6.5	Battery weight +/- 5%		kg					● 23.2 x 2(71Ah)/ ○ 25.8 x 2(89Ah)
6.6	Energy consumption according to EN 16796		kWh					0.45
ADDITION DATA								
8.1	Type of drive control							DC speed control
8.4	Sound level at the driver's ear according to EN 12053		dB(A)					<75


Note: 1kgs=2.2lbs, 25.4mm=1inch

● standard ○ option

MAST DIMENSIONS							
WS15H				Duplex Mast			
h1	Lowered mast height	mm	1480	1730	1980	2130	2230
h3	Lift height	mm	2000	2500	3000	3300	3500
h4	Extended mast height	mm	2435	2935	3435	3735	3935



MAKE YOUR JOB EASIER!

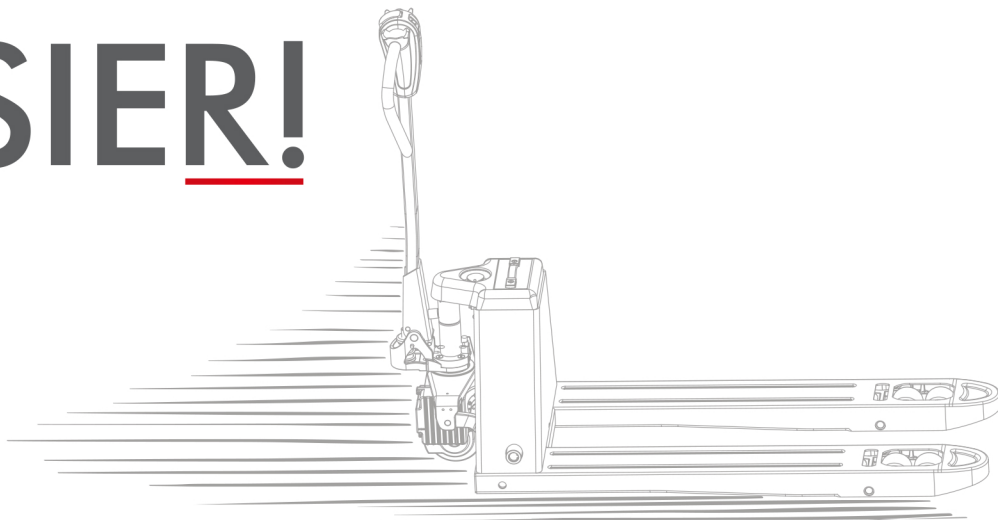The Staxx logo consists of the word "STAXX" in a bold, white, sans-serif font. The final 'X' is stylized with a long, horizontal stroke that extends to the right. The logo is set against a dark grey rectangular background, which is itself enclosed within a red double-line border.

Staxx Europe
Kasteeldreef 23
5151 RR Drunen
The Netherlands
info@staxxeurope.eu
www.staxxeurope.eu
0416-375414

KvK: 18132985
BTW nummer:
NL803449586B01

IBAN: NL27ABNA0504 485822
SWIFT/BIC: ABNANL2A