

# ELECTRIC PEDESTRIAN STACKER

Lifting Height: 2000-4000 mm / Load Capacity: 1200/1500 kg



**Variable Speed  
Control**



**Intelligent & Efficient**



**Rugged & Durable**



**Easy & Comfortable**

# Easy, Safe and Efficient

## Feature

- Proportional speed control for lifting and lowering, fast or slow, as you wish; Easy, safe and efficient
- High efficiency, fast lifting and lowering speeds
- Compact size in narrow warehouse environments with efficient and easy pallet stacking
- Intelligent and efficient
- Sturdy, robust, and durable

## Option

- Lithium Battery



24V 60/100Ah

- Intelligent Control



- Lifting button
- Lowering button
- Max speed setting button
- Horn button

### WS15H



**Capacity:**  
1500kg  
**Lift Height:**  
2000-4000mm  
**Fork size:**  
560/680 x 1150mm  
**Battery:**  
24V 71Ah/89Ah (C5)

**Work Faster**  
**Less time** waiting  
for Lift & Lower



### WS12H



**Capacity:**  
1200kg  
**Lift Height:**  
2000-3500mm  
**Fork size:**  
560/680 x 1150mm  
**Battery:**  
24V 71Ah/89Ah (C5)

### WS12H-FL



**Capacity:**  
1200kg  
**Lift Height:**  
2500-3500mm  
**Free lift height:**  
1300-1800mm  
**Fork size:**  
560/680 x 1150mm  
**Battery:**  
24V 71Ah/89Ah (C5)

| Lifting Height (mm) | 2500 | 3000 | 3300 | 3500 |
|---------------------|------|------|------|------|
| Free lift (mm)      | 1300 | 1550 | 1700 | 1800 |

### WSS15H



**Capacity:**  
1500kg  
**Lift Height:**  
2000-3500mm  
**Fork size:**  
40x100x1070  
(1150/1200/1220)  
**Battery:**  
24V 71Ah/89Ah (C5)

| ID(mm) | 970  | 1110 | 1250 |
|--------|------|------|------|
| OD(mm) | 1150 | 1290 | 1430 |




# Variable Speed Control on Lifting & Lowering

Comfortable and efficient thanks to STAXX patented intelligent handle and control system, ideal for replacing manual & semi-electric stackers, for light use in narrow warehouse environments with efficient and easy pallet stacking.

The proportional lowering brings high efficiency for exact pallet placement and more precise control when compared to the normal fixed speed of lifting & lowering.


Variable speed control by proportional control knob, keeps lifting and lowering smooth, stable, safe and energy saving.

BEFORE



FIXED SPEED

NEW



## Precise Control

### ■ Proportional lifting & lowering

The variable speed control ensures the stacker goes up and down smoothly, minimizing the mechanical shock and vibration, ensuring fragile loads are gently placed on racking or the floor, and reducing the impact of noise and vibration on operators.

### ■ Lowering buffering

Automatic lowering speed descent with soft buffering when the fork height is lowered to around 10cm from the ground, effectively protects the safety of the cargo, low noise and small vibration.

### ■ High efficiency


The variable speed control brings accurate response for adjusting the lifting & lowering speed according to the actual situation, the operator can easily complete the task and improve the working efficiency.

### ■ Energy saving

Compared to the traditional fixed lifting & lowering speed, variable speed can be adjusted according to the load and height by operator, reducing energy waste and improving energy utilization rate.

### ■ Longer service life

Variable speed control can reduce the mechanical impact and friction during lifting & lowering, reduce the wear and tear on the chassis, mast, bearings, and enable a longer service life.



# Intelligent & Efficient

Staxx patented multifunctional intelligent tiller handle is unique design for quick fault diagnosis, enabling an easier service, shorter service time and lowered labor costs.



## Multifunctional intelligent tiller handle




## Easy Maintenance

### Serial communication technology

Single wiring harness communication from tiller handle to controller system. Simple, Durable and Stable.

UART

- ✓ Low after-sales service cost
- ✓ Quick & easy fault diagnosis
- ✓ Everyone can be an expert

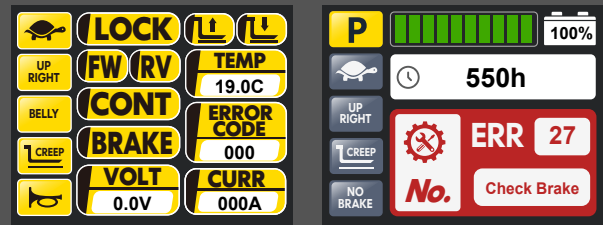

Operation status & fault diagnosis are integrated onto the tiller handle display for easy troubleshooting.

## Operator Preferred

### Turtle Speed


01



Enable operator to choose different speed modes based on their experience and the specific work environment.

### Up-Right Drive

02

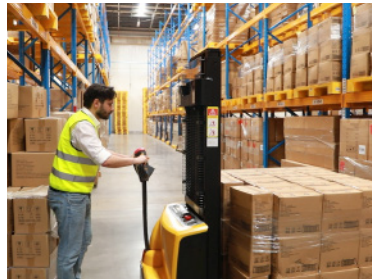

Easily maneuvered with the handle in the vertical position by pressing the turtle-speed button.

### Engineering Mode (Brake Release)

03



When truck is down, release the brake to move the unit manually.




# Rugged & Durable

Due to a high-strength frame and mast design and solid materials used, the deformation of the frame, mast, and forks is small.



## Longer service life

Mast: Standard C+H channel steel  
Frame: Steel plate thickness of 5mm  
Frame bottom plate: 30mm integrated steel plate.

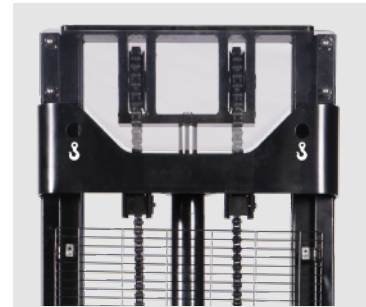

## Double-chain design

Compared with single-chain design, it has higher strength, safer and more stable.


## Small deformation of forks and masts, stable and durable

More stable when lifting & lowering with loads.

## Full coverage protection on mast

## Standard equipped with cylinder explosion-proof valve

It can prevent accidents such as uncontrolled descent caused by unexpected rupture of oil pipes, ensuring stable descent of the load and personal safety, and preventing damage to equipment.



## High-strength forks

16mm flat iron on both sides of fork. High strength and small deformation even under heavy loads.

## The battery is fixed at the bottom of the frame

Improved stability.

## Battery low voltage protection

Effectively avoid battery over-discharge, ensuring a longer battery life.

# Safe operation

## Emergency reverse switch

In case of an emergency, it protects the operator and the surrounding personnel from harm.

## Safety travel speed limit

When the fork is lifted to above 500mm, the driving speed automatically reduces to 2km/h to ensure the safety of operating at a high position in case of any misoperation.



## Built-in charger

Hidden charging plug, high safety, the whole vehicle is powered off during charging, reducing safety hazards.

## High lateral and longitudinal stability

Wider wheelbase and longer axle distance.

## Adjustable balance wheel

Improved stability and maneuverability, suitable for different working scenarios.

## The low ground clearance of 30 mm helps to reduce the risk of foot injuries



# Easy & Comfortable



- **Effortless, easy to operate**

Low-mounted longer tiller reduces steering force required.

- **Low mast static height**

Easy to operate in containers and elevators with less than 3.3m lifting height.

- **The steering angle is designed to be above 180 degrees**

Small turning radius.

- **Excellent maneuverability**

Precise and maneuverable operating, high safety and efficiency.

- **Reasonable design of the balancing wheel eccentric distance.**


Flexible direction commutation.

- **Easy to recharge**

Built-in charger and an external charging cable storage box for convenient charging.

- **Longer operating time**

Standard 24V/71Ah maintenance-free lead-acid battery, with the option of a larger capacity maintenance-free battery or a lithium battery.

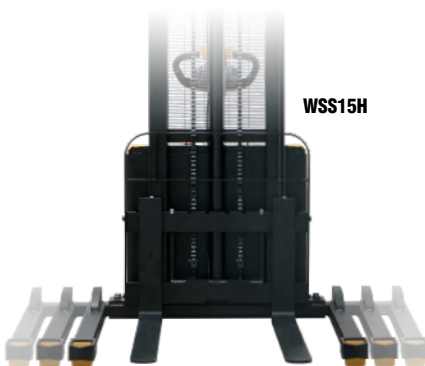

- **Adjustment of support legs and forks**

The adjustable straddle leg design accommodates different pallet sizes and improves stability. The low silhouette straddle design allows for a lower bottom beam, maximizing storage space in the facility.

The support legs are fixed with three screws per side outside the truck's body, allowing for easy adjustment to achieve widths of 1150mm, 1290mm, and 1430mm. Forged forks with adjustable widths from 200mm to 800mm, ensure durability and versatility. The truck includes a standard load backrest (LBR) for enhanced safety during material handling.





## Optional Configuration

### ● Intelligent control

Unique in the market and very suitable for sorting operations on trucks.

With a dedicated remote control device, the operator can control the forks to lift to the appropriate working height and carry out sorting operations, thus avoiding the need to use the handle buttons and bend over to pick up goods, improving operational efficiency and comfort.



● Lifting button

● Max speed setting button

● Lowering button



● Horn button

● On/Off (for Intelligent control)



With the remote control device, you can easily set the speed suitable for the work, from level 1 speed to level 5 speed.

Such speed transitions allow you to move the truck with controlled operation at ease.



### ● Reversing buzzer



### ● 24V 60Ah(100Ah) LiFePO Lithium battery

### ● 24V/15A (30A) chargers

Lithium Battery Charger  
Charging time: 2~4 hours



# Dimensions

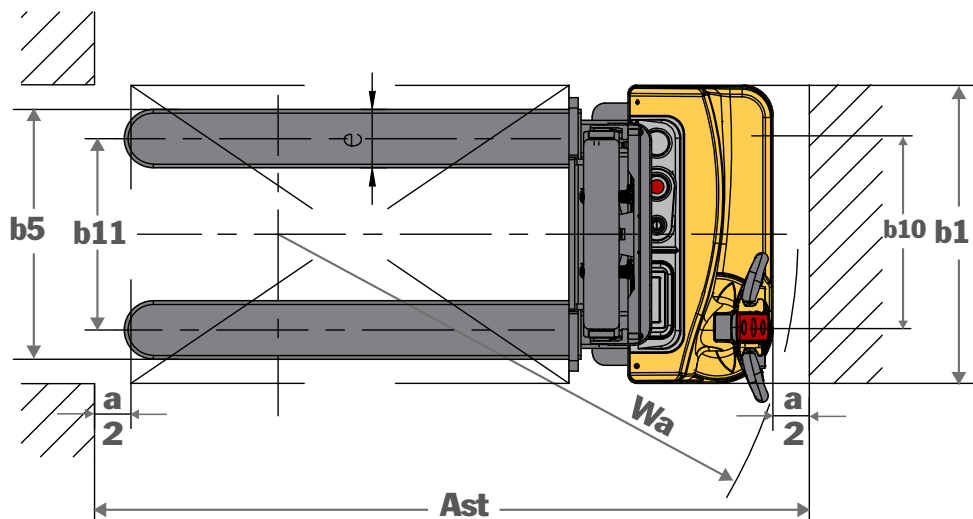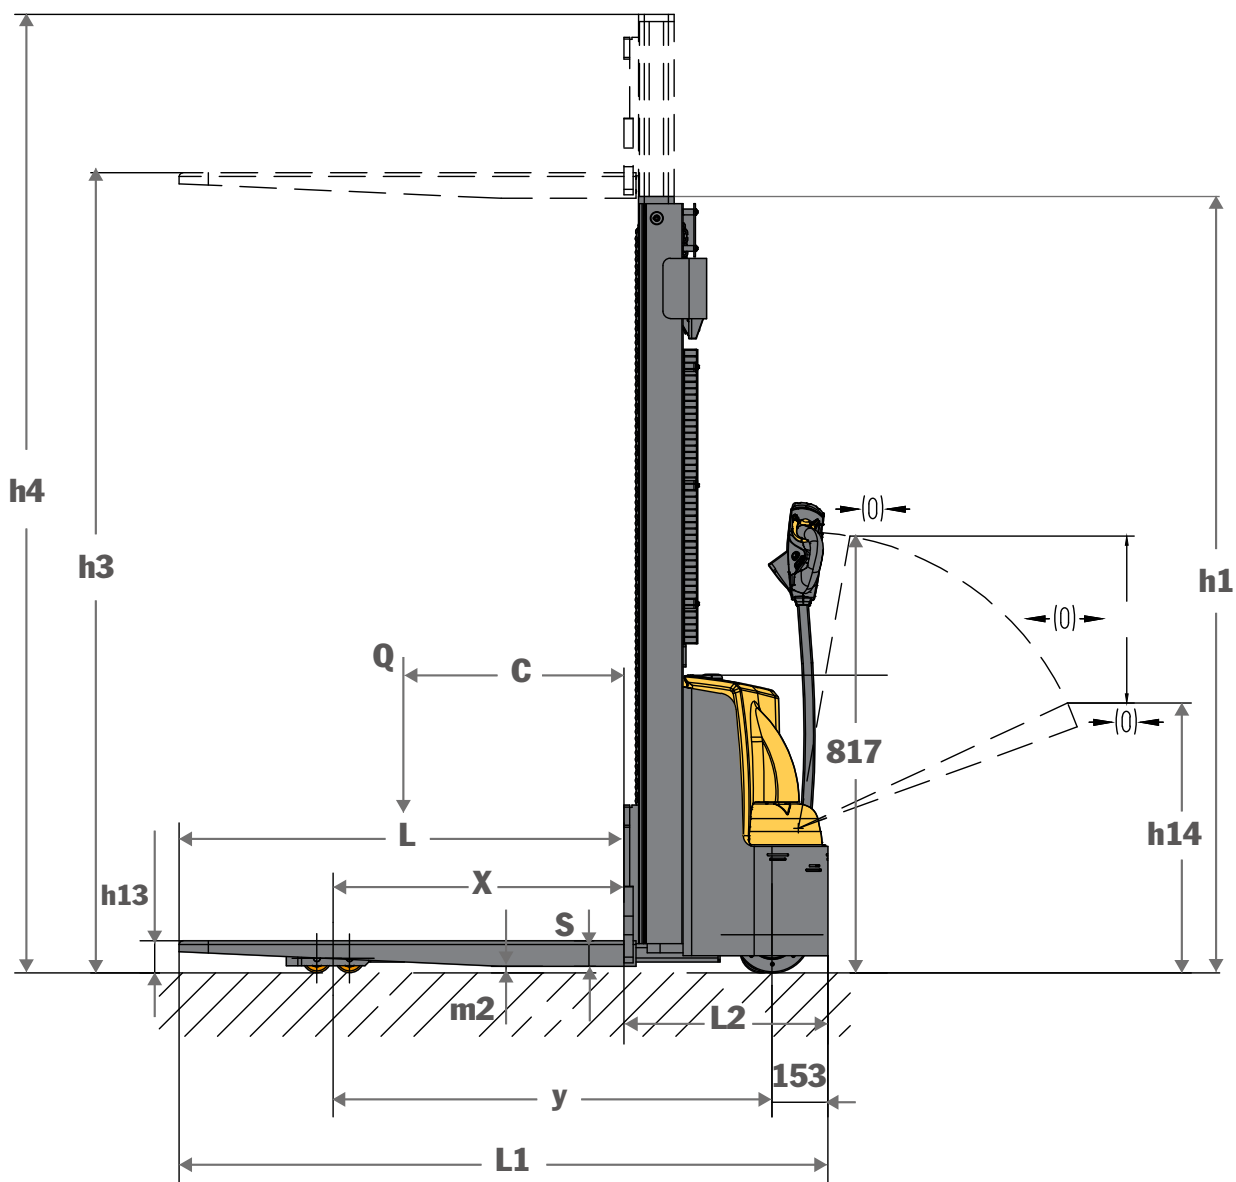




# Specifications



| MODEL                |                                                       |           |         | WS15H                              |      |      |      |      |      | WS12H                              |      |      |      |      |      | WS12H-FL                                  |      |      |  |
|----------------------|-------------------------------------------------------|-----------|---------|------------------------------------|------|------|------|------|------|------------------------------------|------|------|------|------|------|-------------------------------------------|------|------|--|
| DISTINGUISHING MARKS |                                                       |           |         |                                    |      |      |      |      |      |                                    |      |      |      |      |      |                                           |      |      |  |
| 1.3                  | Drive                                                 |           |         | Battery                            |      |      |      |      |      | Battery                            |      |      |      |      |      | Battery                                   |      |      |  |
| 1.4                  | Operator type                                         |           |         | Pedestrian                         |      |      |      |      |      | Pedestrian                         |      |      |      |      |      | Pedestrian                                |      |      |  |
| 1.5                  | Load capacity/rated load                              | Q         | kg      | 1500                               |      |      |      |      |      | 1200                               |      |      |      |      |      | 1200                                      |      |      |  |
| 1.6                  | Load centre distance                                  | c         | mm      | 600                                |      |      |      |      |      | 600                                |      |      |      |      |      | 600                                       |      |      |  |
| 1.8                  | Load distance, centre of drive axle to fork           | x         | mm      | 800                                |      |      |      |      |      | 800                                |      |      |      |      |      | 800                                       |      |      |  |
| 1.9                  | Wheelbase                                             | y         | mm      | 1210                               |      |      |      |      |      | 1210                               |      |      |      |      |      | 1210                                      |      |      |  |
| WEIGHT               |                                                       |           |         |                                    |      |      |      |      |      |                                    |      |      |      |      |      |                                           |      |      |  |
| 2.1                  | Service weight (without battery)                      |           | kg      | 509                                | 529  | 556  | 565  | 575  | 612  | 508                                | 528  | 555  | 564  | 574  | 535  | 549                                       | 563  | 577  |  |
| 2.2                  | Service weight (with 71Ah battery)                    |           | kg      | 557                                | 577  | 604  | 613  | 623  | 660  | 554                                | 575  | 601  | 610  | 620  | 582  | 596                                       | 610  | 624  |  |
| 2.3                  | Service weight (with 89Ah battery)                    |           | kg      | 562                                | 682  | 609  | 618  | 628  | 665  | 560                                | 580  | 606  | 616  | 626  | 587  | 601                                       | 615  | 629  |  |
| 2.4                  | Axle loading, laden front/rear                        |           | kg      | 618/1441                           |      |      |      |      |      | 527/1231                           |      |      |      |      |      | 535/1247                                  |      |      |  |
| 2.5                  | Axle loading, unladen front/rear                      |           | kg      | 419/140                            |      |      |      |      |      | 418/140                            |      |      |      |      |      | 437/145                                   |      |      |  |
| TYRES/ CHASSIS       |                                                       |           |         |                                    |      |      |      |      |      |                                    |      |      |      |      |      |                                           |      |      |  |
| 3.1                  | Wheels                                                |           |         | Polyurethane                       |      |      |      |      |      | Polyurethane                       |      |      |      |      |      | Polyurethane                              |      |      |  |
| 3.2                  | Wheel size, front                                     | Ø x width | mm      | Ø210x70                            |      |      |      |      |      | Ø210x70                            |      |      |      |      |      | Ø210x70                                   |      |      |  |
| 3.3                  | Wheel size, rear                                      | Ø x width | mm      | Ø80X70                             |      |      |      |      |      | Ø80X70                             |      |      |      |      |      | Ø80X70                                    |      |      |  |
| 3.4                  | Additional wheels (dimensions)                        | Ø x width | mm      | Ø115X55                            |      |      |      |      |      | Ø115X55                            |      |      |      |      |      | Ø115X55                                   |      |      |  |
| 3.5                  | Wheels, number front/rear (x = driven wheels)         |           |         | 1x + 1 / 4                         |      |      |      |      |      | 1x + 1 / 4                         |      |      |      |      |      | 1x + 1 / 4                                |      |      |  |
| 3.6                  | Tread, front                                          | b10       | mm      | 550                                |      |      |      |      |      | 550                                |      |      |      |      |      | 555                                       |      |      |  |
| 3.7                  | Tread, rear(560/680 fork width)                       | b11       | mm      | 390/525                            |      |      |      |      |      | 390/525                            |      |      |      |      |      | 400/520                                   |      |      |  |
| DIMENSIONS           |                                                       |           |         |                                    |      |      |      |      |      |                                    |      |      |      |      |      |                                           |      |      |  |
| 4.2                  | Lowered mast height                                   | h1        | mm      | 1480                               | 1730 | 1980 | 2130 | 2230 | 2550 | 1480                               | 1730 | 1980 | 2130 | 2230 | 1710 | 1960                                      | 2110 | 2210 |  |
| 4.3                  | Free lift height                                      | h2        | mm      | /                                  |      |      |      |      |      | /                                  |      |      |      |      |      | 1300                                      |      |      |  |
| 4.4                  | Lifting height                                        | h3        | mm      | 2000                               | 2500 | 3000 | 3300 | 3500 | 4000 | 2000                               | 2500 | 3000 | 3300 | 3500 | 2500 | 3000                                      | 3300 | 3500 |  |
| 4.5                  | Extended mast height                                  | h4        | mm      | 2435                               | 2935 | 3435 | 3735 | 3935 | 4370 | 2435                               | 2935 | 3435 | 3735 | 3935 | 2917 | 3417                                      | 3717 | 3917 |  |
| 4.9                  | Height of tiller in driving position, min./max.       | h14       | mm      | 910/1270                           |      |      |      |      |      | 910/1270                           |      |      |      |      |      | 910/1270                                  |      |      |  |
| 4.15                 | Height, lowered                                       | h13       | mm      | 85±2                               |      |      |      |      |      | 85±2                               |      |      |      |      |      | 85±2                                      |      |      |  |
| 4.19                 | Overall length(1150/1220 fork length)                 | l1        | mm      | 1730/1800                          |      |      |      |      |      | 1730/1800                          |      |      |      |      |      | 1730/1800                                 |      |      |  |
| 4.20                 | Length to face of forks                               | l2        | mm      | 580                                |      |      |      |      |      | 580                                |      |      |      |      |      | 580                                       |      |      |  |
| 4.21                 | Overall width                                         | b1        | mm      | 820                                |      |      |      |      |      | 820                                |      |      |      |      |      | 820                                       |      |      |  |
| 4.22                 | Fork dimensions                                       | s/e/l     | mm      | 70X160X1150(1220)                  |      |      |      |      |      | 70X160X1150(1220)                  |      |      |      |      |      | 70X160X1150(1220)                         |      |      |  |
| 4.25                 | Width over forks                                      | b5        | b5(mm)  | 560/680                            |      |      |      |      |      | 560/680                            |      |      |      |      |      | 560/680                                   |      |      |  |
| 4.32                 | Ground clearance, centre of wheelbase                 | m2        | m2(mm)  | 30                                 |      |      |      |      |      | 30                                 |      |      |      |      |      | 30                                        |      |      |  |
| 4.34.1               | Aisle width for pallets 1000 × 1200 crossways         | Ast       | Ast(mm) | 2268                               |      |      |      |      |      | 2268                               |      |      |      |      |      | 2268                                      |      |      |  |
| 4.34.2               | Aisle width for pallets 800 × 1200 lengthways         | Ast       | Ast(mm) | 2194                               |      |      |      |      |      | 2194                               |      |      |      |      |      | 2194                                      |      |      |  |
| 4.35                 | Turning radius                                        | Wa        | Wa(mm)  | 1425                               |      |      |      |      |      | 1425                               |      |      |      |      |      | 1425                                      |      |      |  |
| PERFORMANCE DATA     |                                                       |           |         |                                    |      |      |      |      |      |                                    |      |      |      |      |      |                                           |      |      |  |
| 5.1                  | Travel speed, with/without load                       |           | km/h    | 4/4.5                              |      |      |      |      |      | 4/4.5                              |      |      |      |      |      | 4/4.5                                     |      |      |  |
| 5.2                  | Lift speed, without load                              |           | mm/s    | 0-190                              |      |      |      |      |      | 0-230                              |      |      |      |      |      | 0-220/Free lift, 0-208/After free lift    |      |      |  |
|                      | Lift speed, with load                                 |           | mm/s    | 0-102                              |      |      |      |      |      | 0-123                              |      |      |      |      |      | 0-125                                     |      |      |  |
| 5.3                  | Lowering speed, without load                          |           | mm/s    | 20-200                             |      |      |      |      |      | 26-278                             |      |      |      |      |      | 26-145/Free lift, 26-245/Before free lift |      |      |  |
|                      | Lowering speed, with load                             |           | mm/s    | 30-135                             |      |      |      |      |      | 28-164                             |      |      |      |      |      | 28-165                                    |      |      |  |
| 5.8                  | Max. gradeability, with/without load                  |           | %       | 5/10                               |      |      |      |      |      | 5/10                               |      |      |      |      |      | 5/10                                      |      |      |  |
| 5.10                 | Service brake                                         |           |         | Electromagnetic                    |      |      |      |      |      | Electromagnetic                    |      |      |      |      |      | Electromagnetic                           |      |      |  |
| ELECTRIC-ENGINE      |                                                       |           |         |                                    |      |      |      |      |      |                                    |      |      |      |      |      |                                           |      |      |  |
| 6.1                  | Drive motor rating S2 60 min                          |           | kW      | 0.75                               |      |      |      |      |      | 0.75                               |      |      |      |      |      | 0.75                                      |      |      |  |
| 6.2                  | Lift motor rating at S3 15%                           |           | kW      | 2.5                                |      |      |      |      |      | 2.5                                |      |      |      |      |      | 2.5                                       |      |      |  |
| 6.4                  | Battery voltage/nominal capacity (K5)                 |           | V/Ah    | ● 12/71 x 2 ○ (12/89) x 2          |      |      |      |      |      | ● 12/71 x 2 ○ (12/89) x 2          |      |      |      |      |      | ● 12/71 x 2 ○ (12/89) x 2                 |      |      |  |
| 6.5                  | Battery weight +/- 5%                                 |           | kg      | ● 23.2 x 2(71Ah)/ ○ 25.8 x 2(89Ah) |      |      |      |      |      | ● 23.2 x 2(71Ah)/ ○ 25.8 x 2(89Ah) |      |      |      |      |      | ● 23.2 x 2(71Ah)/ ○ 25.8 x 2(89Ah)        |      |      |  |
| 6.6                  | Energy consumption according to EN 16796              |           | kWh     | 0.42                               |      |      |      |      |      | 0.42                               |      |      |      |      |      | 0.42                                      |      |      |  |
| ADDITION DATA        |                                                       |           |         |                                    |      |      |      |      |      |                                    |      |      |      |      |      |                                           |      |      |  |
| 8.1                  | Type of drive control                                 |           |         | DC seed control                    |      |      |      |      |      | DC seed control                    |      |      |      |      |      | DC seed control                           |      |      |  |
| 8.4                  | Sound level at the driver's ear according to EN 12053 |           | dB(A)   | <75                                |      |      |      |      |      | <75                                |      |      |      |      |      | <75                                       |      |      |  |
|                      | Controller                                            |           |         | STAXX P1201                        |      |      |      |      |      |                                    |      |      |      |      |      |                                           |      |      |  |

Note: 1kgs=2.2lbs, 25.4mm=1inch  
● standard ○ option

## LOAD CHART

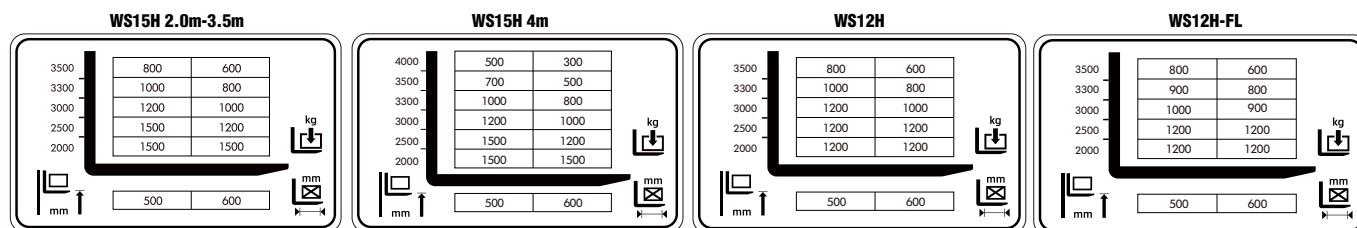

# Dimensions

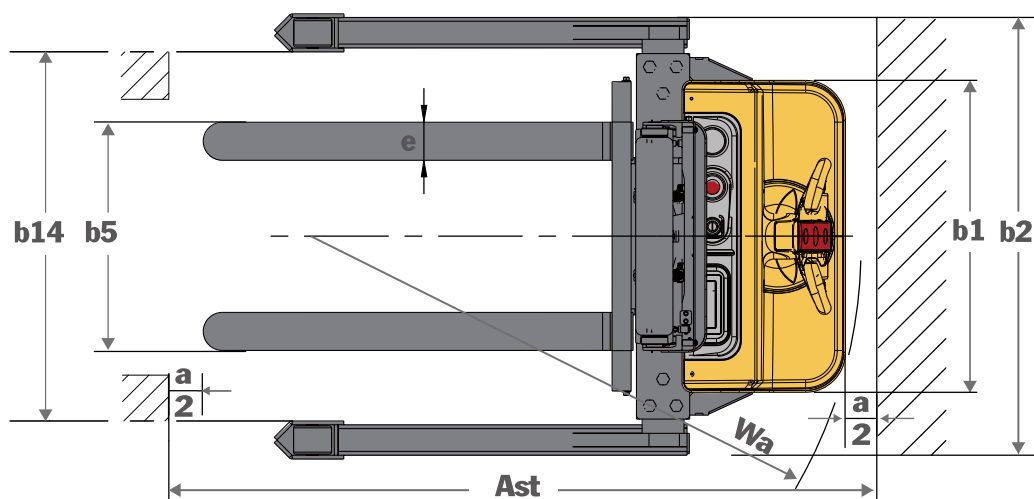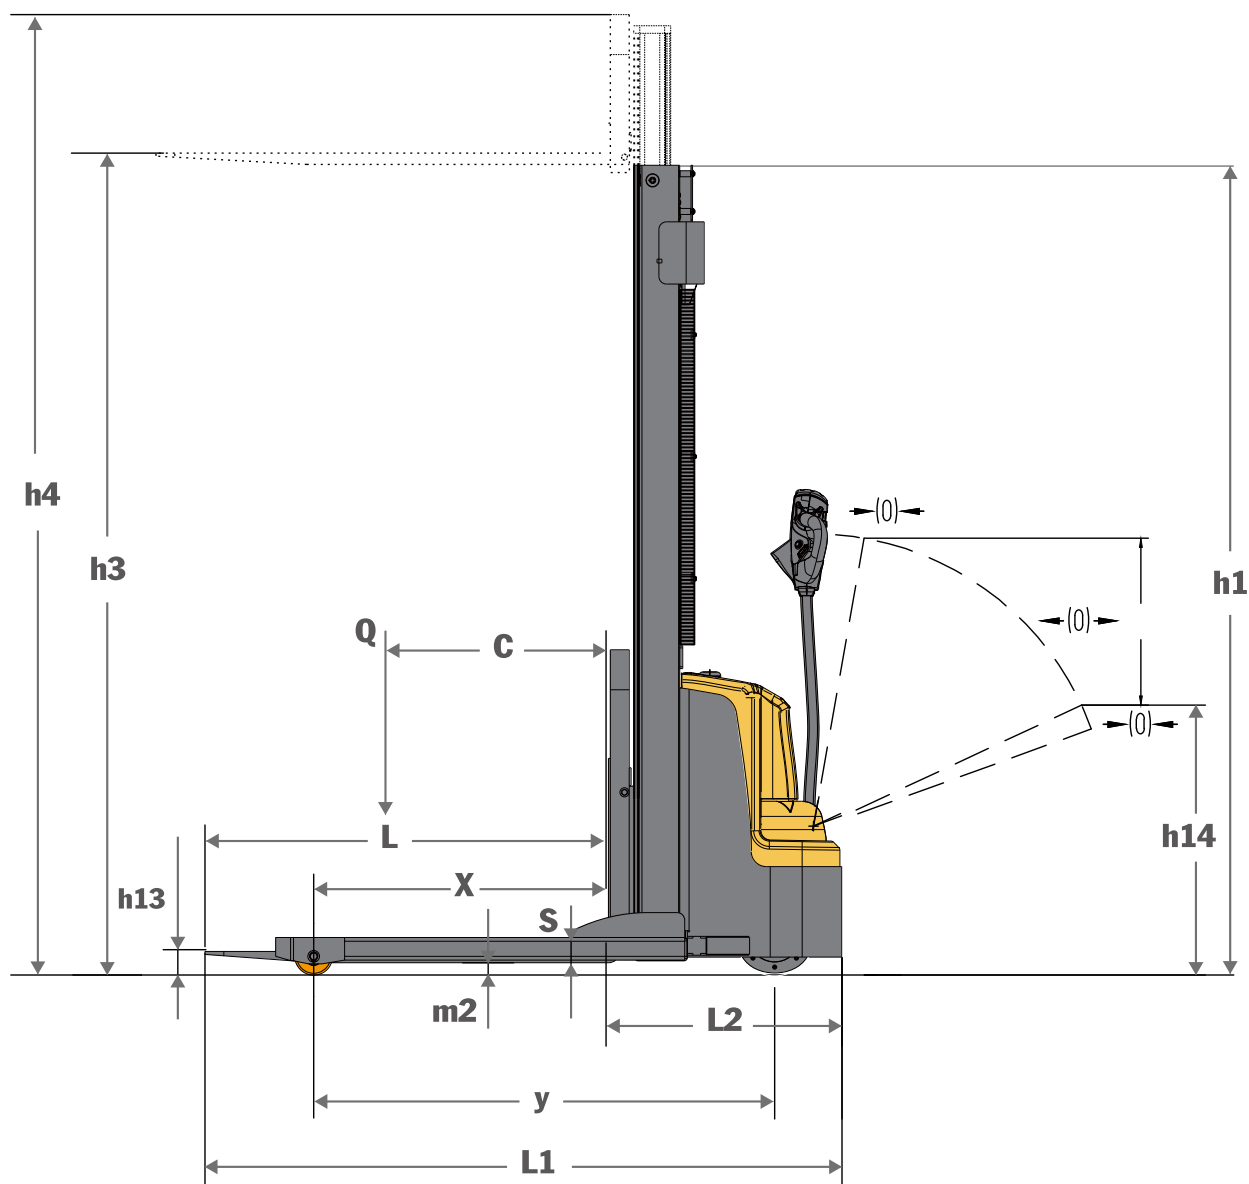


# Specifications

| MODEL                |                                                       |           |         | WSS15H                             |       |            |       |       |
|----------------------|-------------------------------------------------------|-----------|---------|------------------------------------|-------|------------|-------|-------|
| DISTINGUISHING MARKS |                                                       |           |         |                                    |       |            |       |       |
| 1.3                  | Drive                                                 |           |         |                                    |       | Battery    |       |       |
| 1.4                  | Operator type                                         |           |         |                                    |       | Pedestrian |       |       |
| 1.5                  | Load capacity/rated load                              | Q         | kg      |                                    |       | 1500       |       |       |
| 1.6                  | Load centre distance                                  | c         | mm      |                                    |       | 600        |       |       |
| 1.8                  | Load distance, centre of drive axle to fork           | x         | mm      |                                    |       | 768        |       |       |
| 1.9                  | Wheelbase                                             | y         | mm      |                                    |       | 1218       |       |       |
| WEIGHT               |                                                       |           |         |                                    |       |            |       |       |
| 2.1                  | Service weight (without battery)                      |           | kg      | 581.6                              | 604.6 | 634.6      | 666.6 | 702.6 |
| 2.2                  | Service weight (with 71Ah battery)                    |           | kg      | 628                                | 651   | 681        | 713   | 749   |
| 2.3                  | Service weight (with 89Ah battery)                    |           | kg      | 633.2                              | 656.2 | 686.2      | 718.2 | 754.2 |
| 2.4                  | Axle loading, laden front/rear                        |           | kg      | 645/1506                           |       |            |       |       |
| 2.5                  | Axle loading, unladen front/rear                      |           | kg      | 488/163                            |       |            |       |       |
| TYRES / CHASSIS      |                                                       |           |         |                                    |       |            |       |       |
| 3.1                  | Wheels                                                |           |         | Polyurethane                       |       |            |       |       |
| 3.2                  | Wheel size, front                                     | Ø x width | mm      | Ø210 x 70                          |       |            |       |       |
| 3.3                  | Wheel size, rear                                      | Ø x width | mm      | φ100x64                            |       |            |       |       |
| 3.5                  | Wheels, number front/rear (x = driven wheels)         |           |         | 1x +0 /2                           |       |            |       |       |
| 3.7                  | Tread, rear                                           |           | mm      | 1060/1200/1340                     |       |            |       |       |
| DIMENSIONS           |                                                       |           |         |                                    |       |            |       |       |
| 4.2                  | Lowered mast height                                   | h1        | mm      | 1520                               | 1770  | 2020       | 2170  | 2270  |
| 4.4                  | Lift height                                           | h3        | mm      | 2000                               | 2500  | 3000       | 3300  | 3500  |
| 4.5                  | Extended mast height                                  | h4        | mm      | 2520                               | 3020  | 3520       | 3820  | 4020  |
| 4.9                  | Height of tiller in driving position, min./max.       | h14       | mm      | 910/1290                           |       |            |       |       |
| 4.15                 | Height, lowered                                       | h13       | mm      | 60±2                               |       |            |       |       |
| 4.19                 | Overall length                                        | l1        | mm      | 1698                               |       |            |       |       |
| 4.20                 | Length to face of forks                               | l2        | mm      | 628                                |       |            |       |       |
| 4.21.1               | Overall width across chassis                          | b1        | mm      | 820                                |       |            |       |       |
| 4.21.2               | Overall width across all/Outer width straddle         | b2        | mm      | 1150/1290/1430                     |       |            |       |       |
| 4.21.5               | Inner width straddle                                  | b14       | mm      | 970/1110/1250                      |       |            |       |       |
| 4.22                 | Fork dimensions                                       | s/e/l     | mm      | 40X100X1070(1150/1220)             |       |            |       |       |
| 4.25                 | Width over forks                                      | b5        | b5(mm)  | 200-800                            |       |            |       |       |
| 4.32                 | Ground clearance, centre of wheelbase                 | m2        | m2(mm)  | 40                                 |       |            |       |       |
| 4.34.1               | Aisle width for pallets 1000 × 1200 crossways         | Ast       | Ast(mm) | 2290                               |       |            |       |       |
| 4.34.2               | Aisle width for pallets 800 × 1200 lengthways         | Ast       | Ast(mm) | 2217                               |       |            |       |       |
| 4.35                 | Turning radius                                        | Wa        | Wa(mm)  | 1455                               |       |            |       |       |
| PERFORMANCE DATA     |                                                       |           |         |                                    |       |            |       |       |
| 5.1                  | Travel speed, with/without load                       |           | km/h    | 4/4.5                              |       |            |       |       |
| 5.2                  | Lift speed, without load                              |           | mm/s    | 0-185                              |       |            |       |       |
|                      | Lift speed, with load                                 |           | mm/s    | 0-101                              |       |            |       |       |
| 5.3                  | Lowering speed, without load                          |           | mm/s    | 21.7-208                           |       |            |       |       |
|                      | Lowering speed, with load                             |           | mm/s    | 25.6-137                           |       |            |       |       |
| 5.8                  | Max. gradeability, with/without load                  |           | %       | 5/10                               |       |            |       |       |
| 5.10                 | Service brake                                         |           |         | Electromagnetic                    |       |            |       |       |
| ELECTRIC-ENGINE      |                                                       |           |         |                                    |       |            |       |       |
| 6.1                  | Drive motor rating S2 60 min                          |           | kW      | 0.75                               |       |            |       |       |
| 6.2                  | Lift motor rating at S3 15%                           |           | kW      | 2.5                                |       |            |       |       |
| 6.4                  | Battery voltage/nominal capacity K5                   |           | V/Ah    | ● 12/71 x 2 ○ (12/89) x 2          |       |            |       |       |
| 6.5                  | Battery weight +/- 5%                                 |           | kg      | ● 23.2 x 2(71Ah)/ ○ 25.8 x 2(89Ah) |       |            |       |       |
| 6.6                  | Energy consumption according to EN 16796              |           | kWh     | 0.42                               |       |            |       |       |
| ADDITION DATA        |                                                       |           |         |                                    |       |            |       |       |
| 8.1                  | Type of drive control                                 |           |         | DC speed control                   |       |            |       |       |
| 8.4                  | Sound level at the driver's ear according to EN 12053 |           | dB(A)   | <75                                |       |            |       |       |
|                      | Controller                                            |           |         | STAXX P1201                        |       |            |       |       |

● standard ○ option


Note: 1kgs=2.2lbs, 25.4mm=1inch

| MAST DIMENSIONS |                      |    |      |             |      |      |      |
|-----------------|----------------------|----|------|-------------|------|------|------|
| WSS15H          |                      |    |      | Duplex Mast |      |      |      |
| h1              | Lowered mast height  | mm | 1520 | 1770        | 2020 | 2170 | 2270 |
| h3              | Lift height          | mm | 2000 | 2500        | 3000 | 3300 | 3500 |
| h4              | Extended mast height | mm | 2520 | 3020        | 3520 | 3820 | 4020 |

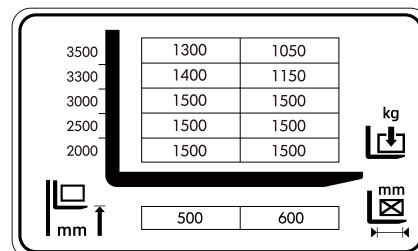



# MAKE YOUR JOB EASIER!

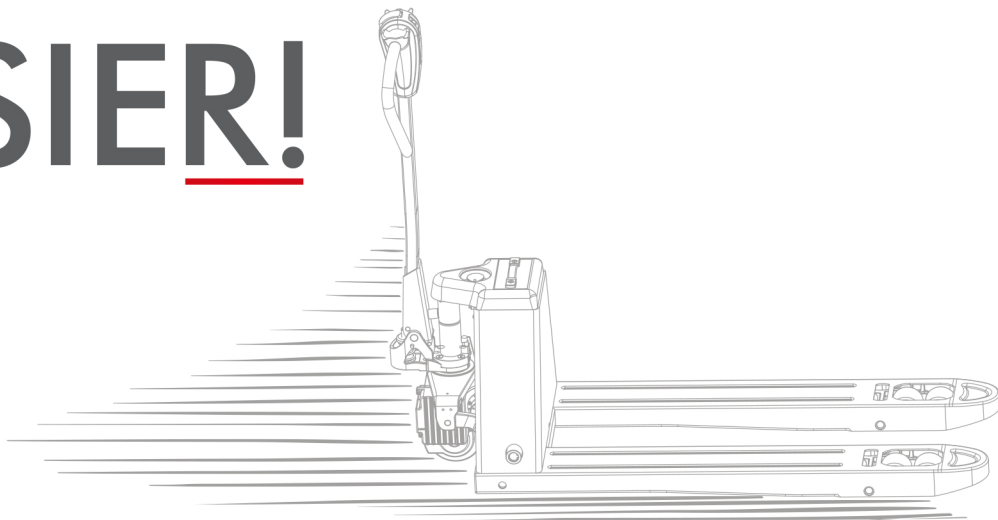The Staxx logo consists of the word "STAXX" in a bold, white, sans-serif font. The letters are slightly italicized, giving a sense of forward motion. A stylized, white, curved line resembling a checkmark or a wing is positioned to the right of the letters. The logo is set against a dark grey rectangular background, which is itself enclosed within a red border.

**Palletwagen-Groothandel**

Kasteeldreef 23

5151 RR Drunen

The Netherlands

0416-375414

[verkoop@palletwagen-groothandel.nl](mailto:verkoop@palletwagen-groothandel.nl)

[www.palletwagen-groothandel.nl](http://www.palletwagen-groothandel.nl)

KvK: 18132985

BTW nummer:

NL803449586B01

IBAN: NL27ABNA0504 485822

SWIFT/BIC: ABNANL2A